ASSEMBLY INSTRUCTION

NC3MX1-TOP & NC5MX1-TOP | XLR Cable Connector

✓ **IP65 RATED AND TOP-APPROVED.**

TRUE OUTDOOR PROTECTION

1 CABLE & BOOT ASSEMBLY

Ⓐ

Ⓑ

Ⓐ **Cut cable end approx. 45°.**

Ⓑ **Slide the bushing over the cable.**

To ease the boot assembly, apply some cable pulling lubricant to the cable ends.

2 ASSEMBLE INSERT AND CONNECTOR

Ⓐ **Cable O.D.: 5.0 - 8.0 mm [0.19 - 0.32"]**

Ⓐ **Prepare cable as shown.**

Ⓑ

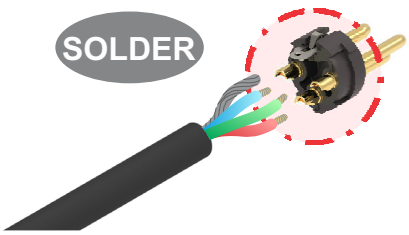

Ⓑ **Insert wires into the terminals and solder them.**

Wiring: 3 pole 5 pole

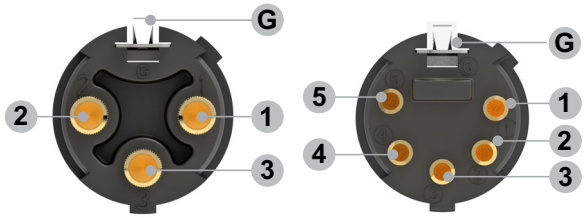

Ⓒ

Ⓒ **Put chuck onto the cable.**

Pay attention to the guiding key.

Ⓓ

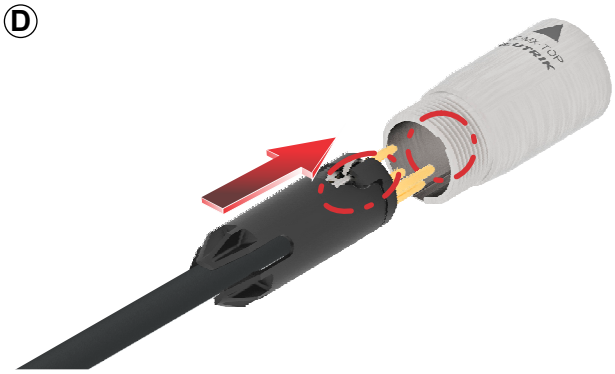

Ⓓ **Slide insert and chuck together into the housing.**

Important:
Align the insert by positioning as shown.

Ⓔ

Ⓔ **Finish the installation by turning the bushing onto the connector.**

Attention:
Screw the bushing to the end of the thread.

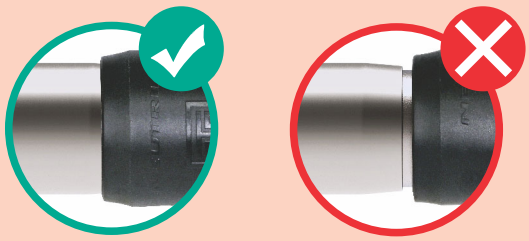

✓ FINISHED XLR TOP

✓ FINISHED XLR CONNECTOR

i More Information on the website

https://www.neutrik.com/en/products/audio/xlr

Data subject to change without prior notice. © 2023 NEUTRIK®. NEUTRIK® are registered trademark of Neutrik AG. ALL RIGHTS RESERVED.