


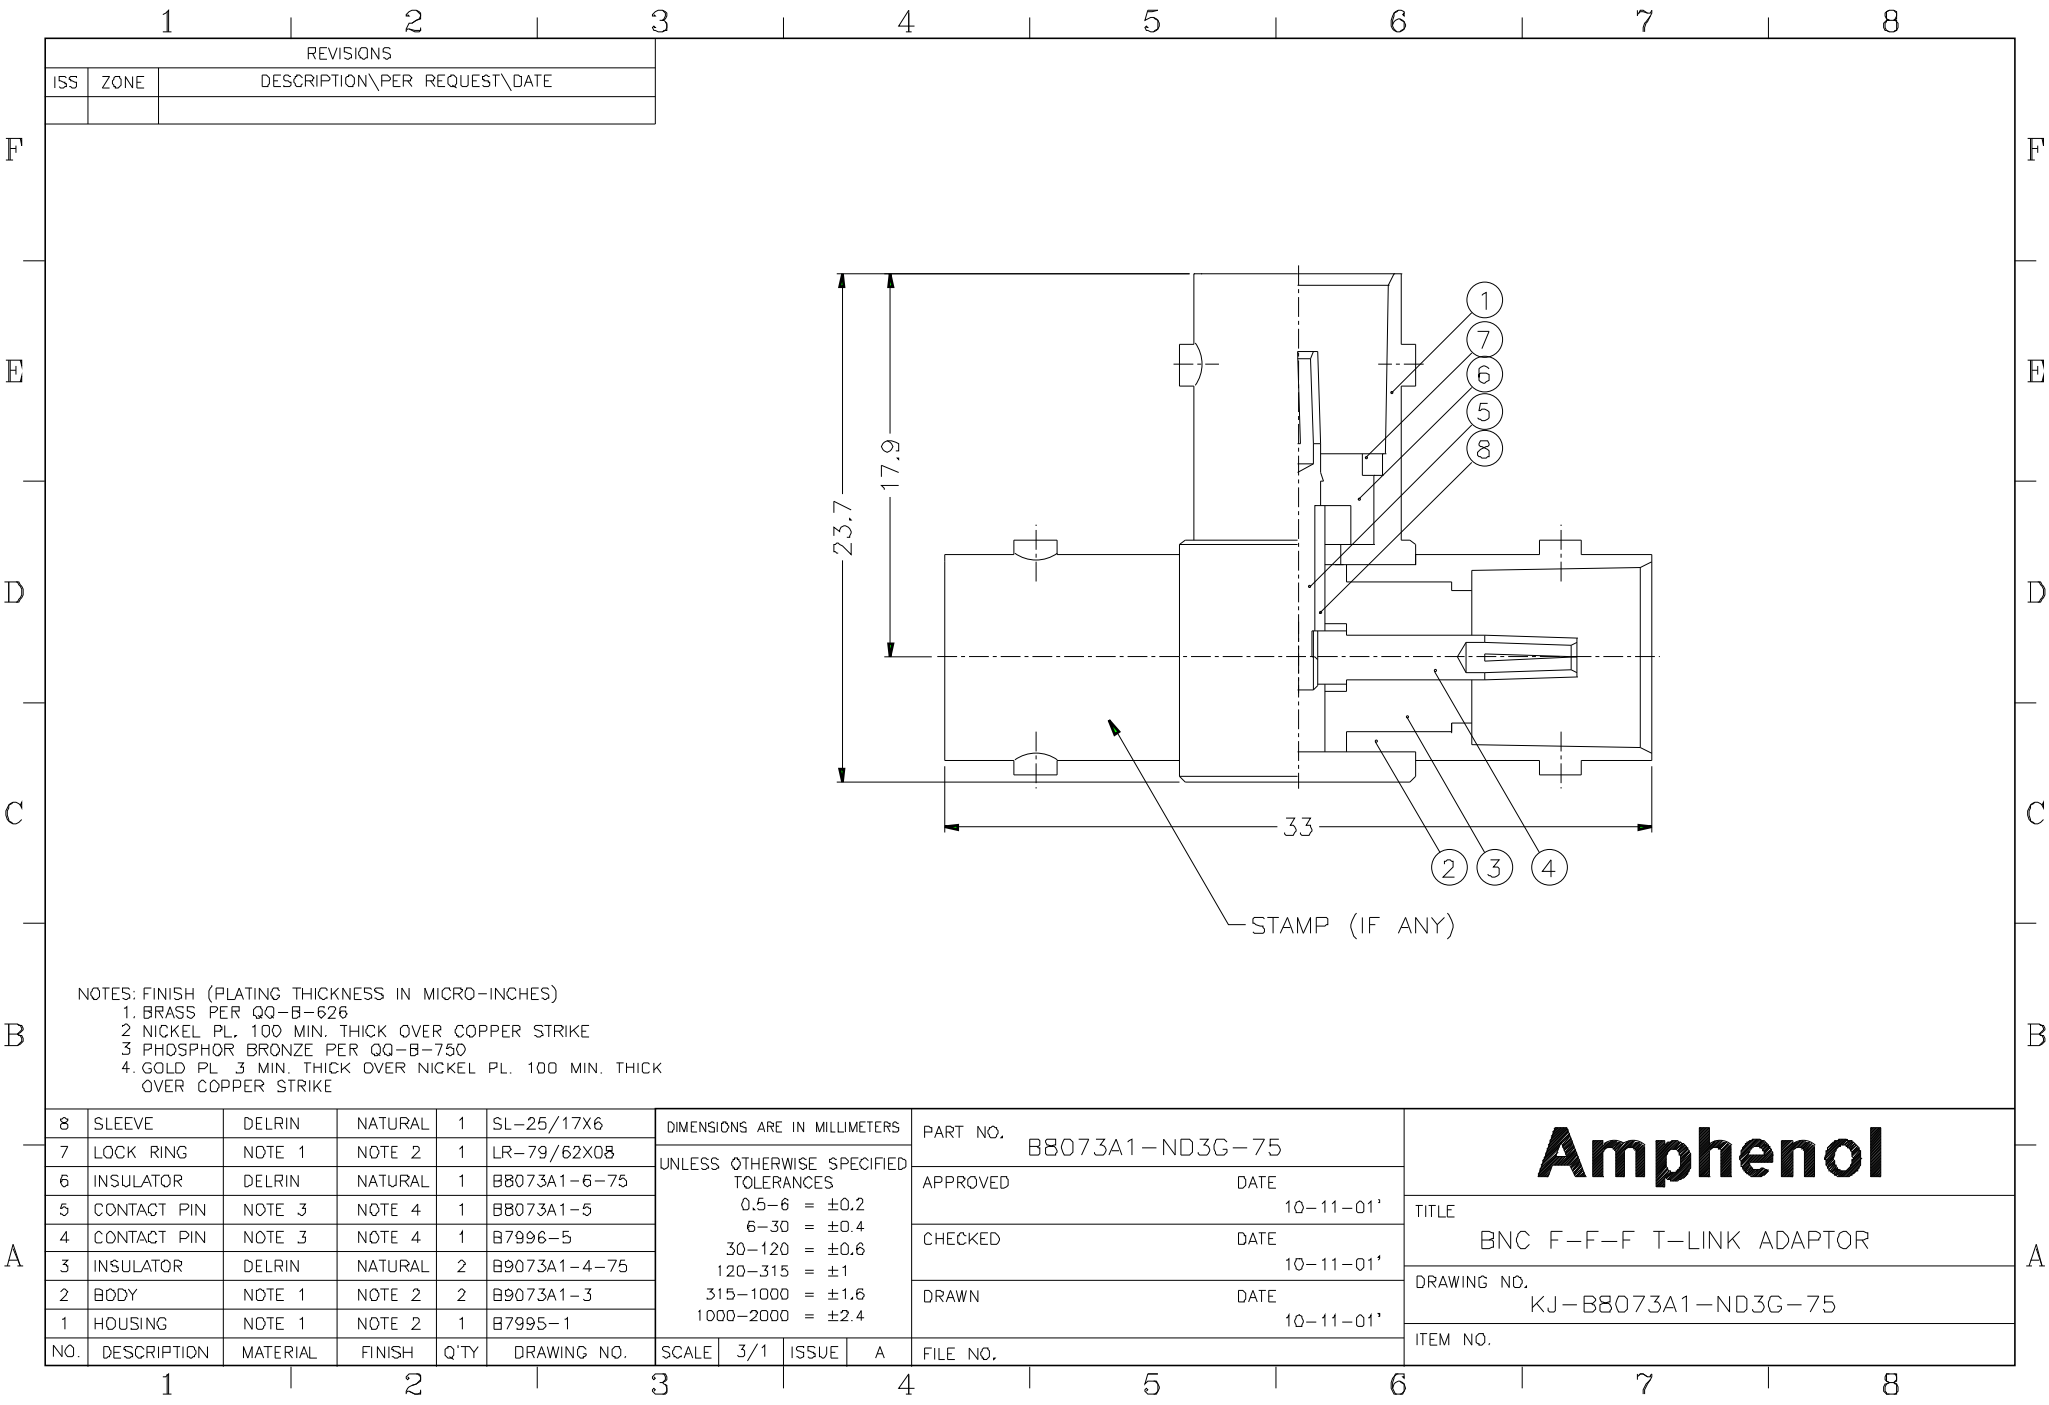

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. PHOSPHOR BRONZE PER QQ-B-750
4. GOLD PL 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE

8	SLEEVE	DELRIN	NATURAL	1	SL-25/17X6	DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED TOLERANCES 0.5-6 = ±0.2 6-30 = ±0.4 30-120 = ±0.6 120-315 = ±1 315-1000 = ±1.6 1000-2000 = ±2.4				PART NO. B8073A1-ND3G-75				Amphenol			
7	LOCK RING	NOTE 1	NOTE 2	1	LR-79/62X08					APPROVED DATE 10-11-01'							
6	INSULATOR	DELRIN	NATURAL	1	B8073A1-6-75					CHECKED DATE 10-11-01'				TITLE BNC F-F-F T-LINK ADAPTOR			
5	CONTACT PIN	NOTE 3	NOTE 4	1	B8073A1-5					DRAWN DATE 10-11-01'				DRAWING NO. KJ-B8073A1-ND3G-75			
4	CONTACT PIN	NOTE 3	NOTE 4	1	B7996-5									ITEM NO.			
3	INSULATOR	DELRIN	NATURAL	2	B9073A1-4-75												
2	BODY	NOTE 1	NOTE 2	2	B9073A1-3												
1	HOUSING	NOTE 1	NOTE 2	1	B7995-1												
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A	FILE NO.							